



Basic Gateway

Powered by  BLUE

Improve Efficiency by Visualizing Production



STM6000 Gateway

proface.com


Pro-faceTM
by Schneider Electric

Quick start IoT with STM6000 Gateway

01

Protocol Converter

Merge data from different devices. Unify protocols and collect data efficiently.

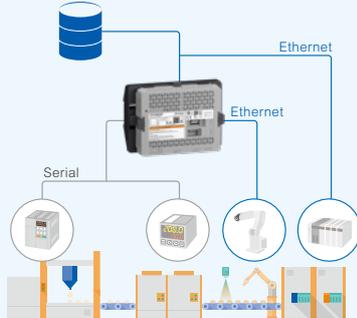

02

On-demand HMI


See status of equipment or devices in the right place at the right time.



03


Affordable Access Point

Remote Maintenance via a basic HMI Gateway.



System structure

Powered by

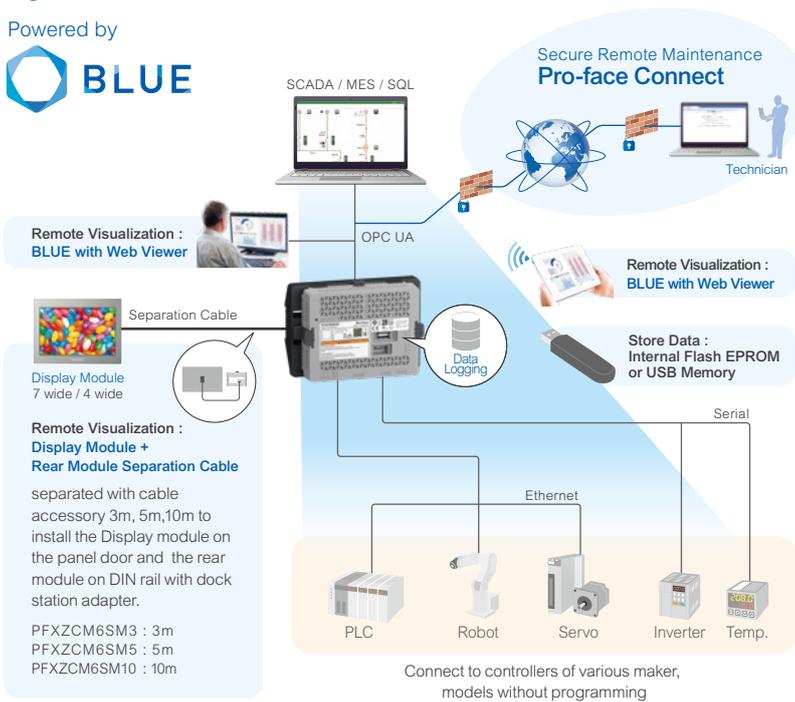

Specification

	STM6000 Gateway
Product image	
Model no.	PFXSTM6B00D
Input Voltage	19.2 to 28.8V DC
Application memory	FLASH EPROM 128MB
Local Storage	FLASH EPROM 467MB
Backup memory	NVRAM 500KB
No. of connected drivers	4
Resolutions	800 x 480 pixels (WVGA)
Interfaces	Serial x 1 Ethernet x 2 USB (Type A) x 1 USB (micro-B) x 1 Extension Display port x 1
Mounting	Din Rail

proface.com

Learn more and download Manual and Datasheet and CADs
www.proface.com/en/product/commu equip/multi_converter_stm/top



Contact Us (Worldwide Pro-face)
<https://www.proface.com/en/contact>

©2021 Pro-face All Rights Reserved.