

3400 Series Flat Panel Industrial PCs

DS-340002(F)



FEATURES

- Preloaded with MS-DOS, 98, or Windows NT® operating system
- Built-in 10/100 BaseT Ethernet port
- PC/104 expansion
- 7.7" to 12.1" flat panel color displays
- Reprogrammable keypad, analog resistive touchscreen, or both for operator input
- AMD™ 5X86 processor
- Up to 64 MB DRAM
- Floppy drive option
- 6.0 GB (or larger) hard drive
- CompactFlash™ drive option
- Parallel, RS-232 and RS-485, PS/2 mouse and keyboard ports
- IrDA-compatible infrared port
- NEMA 4/4X/12 and IP65 front panel
- UL listed for hazardous locations: Class I, Division 2, Groups A, B, C, D; Class II, Division 2, Groups F and G

Xycom Automation's open solutions connect to other automation standards with industrial PCs that are tough enough for plant floor use. (Our standard PC configurations meet the strict specifications for use in hazardous locations and Europe's CE mark.) Based on CPU boards designed specifically for industrial automation, these systems provide the capabilities required by demanding applications. With an installed base of 200,000 systems, our industrial PC products are successfully applied in manufacturing and continuous process environments.

Easy-to-Read, Sharp Displays

We offer a range of displays from 7.7" VGA to 12.1" SVGA displays. An optional analog resistive touchscreen provides a flexible, easy-to-use interface for operator input. Keypad options provide legend and keycode flexibility while maximizing display space.

Meets High Standards

To survive on the plant floor, our PCs meet NEMA 4/4x/12 front panel, FCC, UL, and European CE mark requirements. Xycom Automation also leads the industry in reliability, service, and

support with an optional five year warranty unmatched in the industry.

Open Platform

Built-in Ethernet allows you to connect these units to networks at startup with little effort. With a preloaded Windows operating system, you can communicate with locally or Ethernet connected products and databases through Microsoft and other enabling technologies—including ActiveX, OPC, and standard DDE. Exchange plant floor data with office applications and see what's happening from the plant floor to corporate headquarters.

Fits Your Needs

You can configure and reconfigure Xycom Automation's industrial PCs to fit nearly any application through a wide variety of standard technologies. Our industrial PCs make it easy for end users and vendors to use cost-effective industry-standard components, storage options, PC/104 expansion, and programmable keypads for application specific requirements.



PRODUCT CONFIGURATIONS



Model	3408KP	3408T
Display	7.7" flat panel color display, 640 x 480 (VGA)	7.7" flat panel color display, 640 x 480 (VGA)
Operator Input	51-position keypad	Analog resistive touchscreen
Preloaded OS	MS-DOS, Windows® 98, Windows NT®	MS-DOS, Windows® 98, Window NT®
Ethernet	Built-in 10/100 BaseT	Built-in 10/100 BaseT
Expansion	PC/104 expansion (up to two cards)	PC/104 expansion (up to two cards)




Model	3410KP(T)	3410T
Display	10.4" flat panel color display, 640 x 480 (VGA)	10.4" flat panel color display, 640 x 480 (VGA)
Operator Input	63-position keypad (touchscreen option)	Analog resistive touchscreen
Preloaded OS	MS-DOS, Windows® 98, Windows NT®	MS-DOS, Windows® 98, Window NT®
Ethernet	Built-in 10/100 BaseT	Built-in 10/100 BaseT
Expansion	PC/104 expansion (up to two cards)	PC/104 expansion (up to two cards)




Model	3412KP(T)	3412T
Display	12.1" flat panel color display, 800 x 600 (SVGA)	12.1" flat panel color display, 800 x 600 (SVGA)
Operator Input	63-position keypad (touchscreen option)	Analog resistive touchscreen
Floppy Drive	Option	Option
Preloaded OS	MS-DOS, Windows® 98, Windows NT®	MS-DOS, Windows® 98, Window NT®
Ethernet	Built-in 10/100 BaseT	Built-in 10/100 BaseT
Expansion	PC/104 expansion (up to two cards)	PC/104 expansion (up to two cards)

PRODUCT AND MOUNTING DIMENSIONS

3408KP Mounting

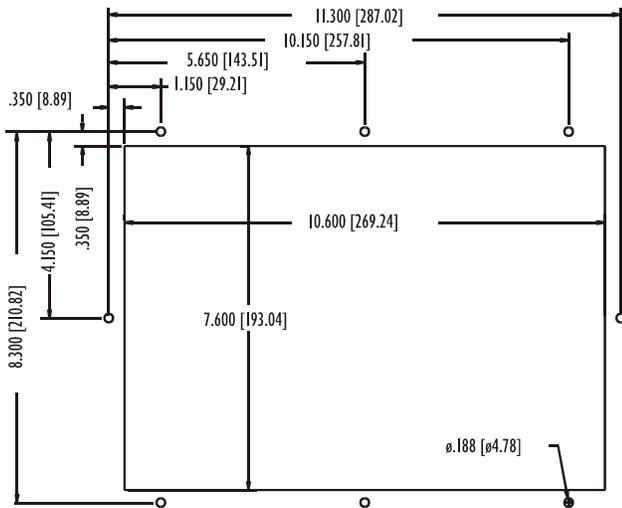


3408T Mounting

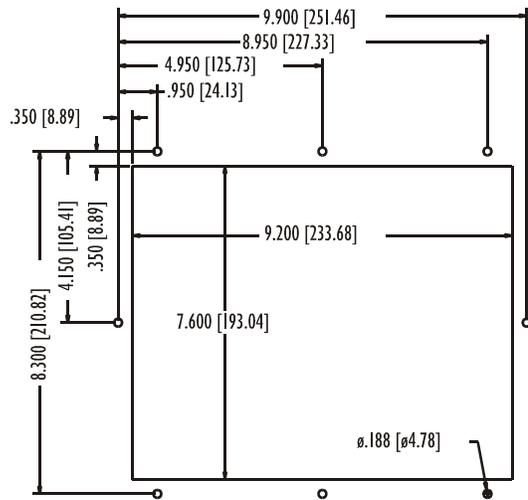


3408 Unit Dimensions

Model	3408KP	3408T
Height	9.00" (228.6 mm)	9.00" (228.6 mm)
Width	12.00" (304.8 mm)	10.60" (269.2 mm)
Depth	4.30" (109.2 mm)	4.20" (106.7 mm)
Mounting Depth	3.30" (83.8 mm)	3.20" (81.3 mm)
Weight	9 lbs (4.1 kg)	9 lbs (4.1 kg)

3410KP(T) Mounting

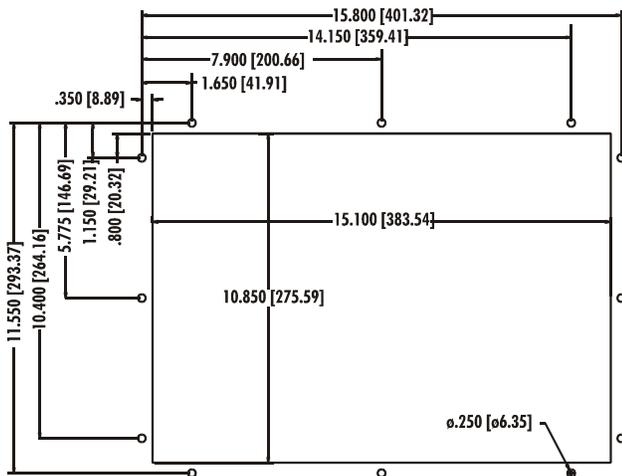

3410T Mounting

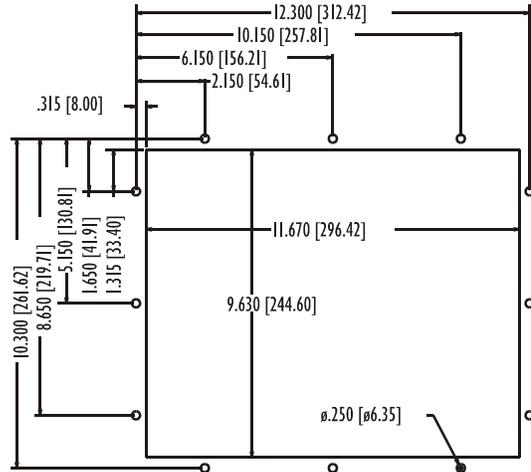


3410 Unit Dimensions


Model	3410KP(T)	3410T
Height	12.25" (311.5 mm)	11.00" (279.4 mm)
Width	16.50" (419.1 mm)	13.00" (330.2 mm)
Depth	4.50" (114.3 mm)	4.50" (114.3 mm)
Mounting Depth	3.50" (88.9 mm)	3.50" (88.9 mm)
Weight	12 lbs (5.5 kg)	11 lbs (5.0 kg)

PRODUCT AND MOUNTING DIMENSIONS

3412KP(T) Mounting

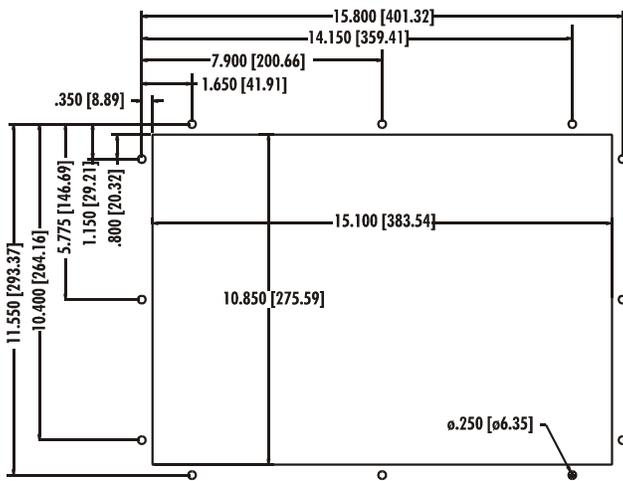

3412T Mounting

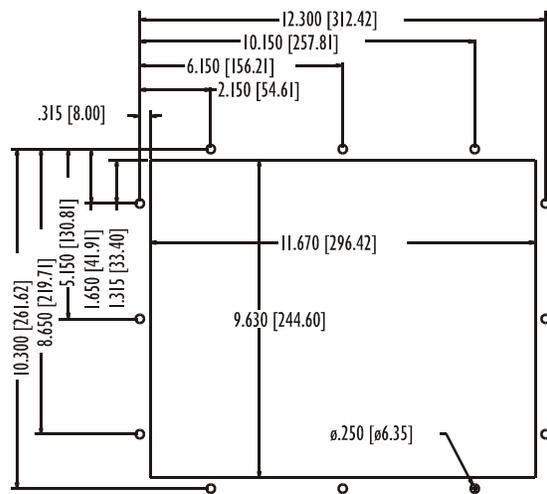

3412 Unit Dimensions

Model	3412KP(T)	3412T
Height	12.25" (311.5 mm)	11.00" (279.4 mm)
Width	16.50" (419.1 mm)	13.00" (330.2 mm)
Depth	4.50" (114.3 mm)	4.50" (114.3 mm)
Mounting Depth	3.50" (88.9 mm)	3.50" (88.9 mm)
Weight	12 lbs (5.5 kg)	11 lbs (5.0 kg)

All dimensions are in inches [millimeters]

PRODUCT SPECIFICATIONS AND RATINGS

Environmental

	Operating	Nonoperating
Thermal	0°C to 50°C	-20°C to 60°C
Humidity	20% to 80% RH, noncondensing	20% to 80% RH, noncondensing
Shock ^a	15g peak acceleration, 11 msec duration	30g peak acceleration, 11 msec duration
Vibration 5-2000 Hz ^a	.006" peak to peak displacement 1.0g maximum acceleration	.015" peak to peak displacement 2.5g maximum acceleration
Altitude	Sea level to 10,000 ft.	Sea level to 40,000 ft.

^a These values are with solid state hard drives and not rotating media drives.

Electrical

Power Supply	40 Watt power
AC Power	90-250V AC, autoranging, 50-60 Hz, 1A (maximum)
DC Power (option)	18-36V DC, 24V nominal, 2.5A (maximum)
Available Power ^b	+5V@.8A +12V@.25A -12V@.25A

^b Total not to exceed 6 Watts

Front Panel

- NEMA 4/4X/12 and IP65

Regulatory Compliance

CE

- EN 55022
- EN 50082-2
- EN 60950

FCC

- 47 CFR, Part 15, Class A

Safety Agency Approvals

UL

- UL 1950 ITE
- UL 1604

cUL

- CSA-C22.2, #950 ITE
- CSA-C22.2, #213

Product certification documentation available at:
www.xycom.com/certifications




ORDERING INFORMATION

To create an order number, follow the conventions defined by the example order numbers and product configurations.

Example Order Number

Order Number	Description
3408(T or KP)-51332	3400 series workstation with 7.7" color display, analog resistive touchscreen or keypad, 32 MB RAM, MS-DOS preloaded, AC power supply, 6.0 GB hard drive.
3410(T or KP)-51332	3400 series workstation with 10.4" color display, reprogrammable keypad and/or keypad, 64 MB RAM, MS-DOS preloaded, AC power supply, 6.0 GB hard drive.

Example Order Number

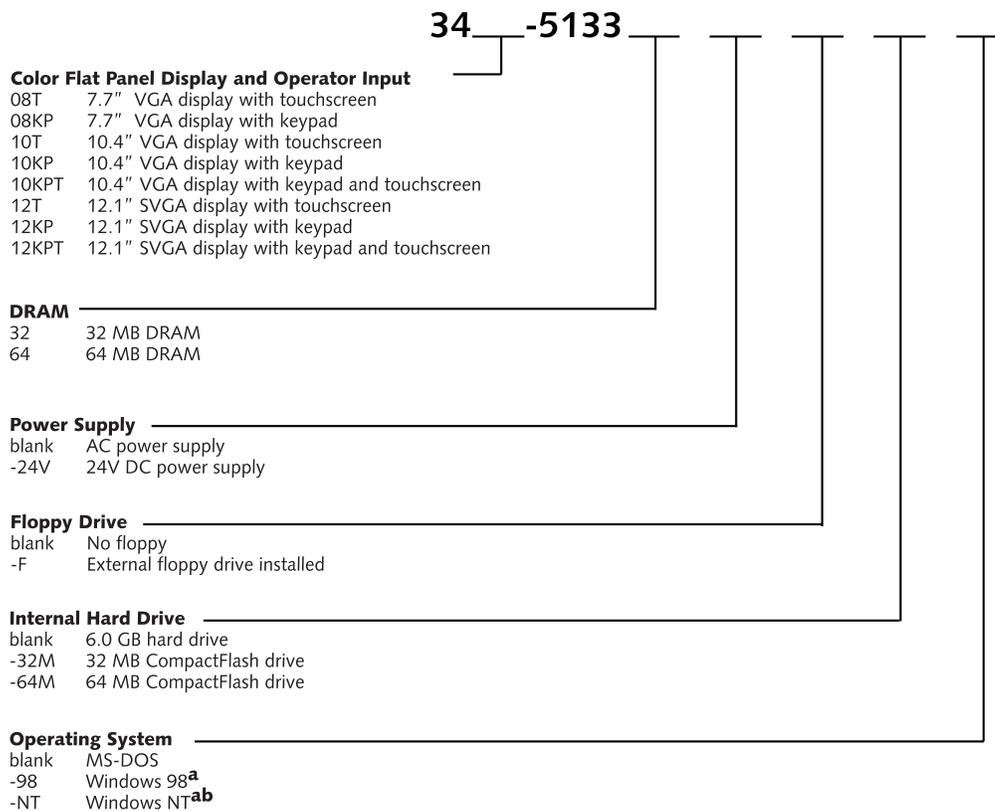

^aRequires 6.0 GB minimum hard drive ^bRequires 64 MB DRAM

Xycom Automation, Inc.
 750 North Maple Rd.
 Saline, MI 48176-1292
 Phone: 734-429-4971
 Fax: 734-429-1010
<http://www.xycom.com>



© 2003 Xycom Automation, Inc. Is a wholly owned subsidiary of Pro-face America, Inc. Specifications may change without notice. Xycom Automation is a trademark of Xycom Automation. Other brand or product names are the property of their respective owners.



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca