

ST-6500TE Basic HMI



Features:

- Aluminum Front Panel
- 16 Million Colors

- Easy to Install
- Single Touch Analog Display

Performance Specifications



Model	PFXST6500TADE	
Graphics Display Resolution	VGA TFT (800 x 600 Pixels)	
Display Type and Size	TFT Color LCD (10.4-inch)	
Display Colors	16 Million colors	
Touch Panel	Resistive film (analog, single touch)	
Effective Display Area	211.2 x 158.4 mm (8.31 x 6.24 in)	
ToucPanel Resolution	1024 x 1024	
Backlight	Backlight White LED (Not user replaceable. When replacement is required, contact customer support.)	
Backlight Service Life	50,000 hours or more (continuous operation at 25 °C [77 °F] before backlight brightness decreases to 25%)	
Brightness Control	16 levels (Adjusted with touch panel or software)	
Interface	USB (Type A)	Conforms to USB 2.0 (Type A) x 1 Power supply voltage: 5 Vdc ±5 % Output Current: 500 mA/port Maximum transmission distance : 5 m [16.4 ft.]
	USB (Type - microB)	Conforms to USB 2.0 (micro-B) x 1, Maximum transmission distance : 5 m [16.4 ft]
	Ethernet	IEEE802.3i/IEEE802.3u, 10BASE-T/100BASE-TX, Connector: Modular jack (RJ-45) x 1
	Serial (COM1)	Asynchronous Transmission: RS-232C, Data Length: 7 or 8 bits, Stop Bit: 1 or 2 bits, Parity: None, Even or Odd, Data Transmission Speed: 2,400 to 115,200 bps, Connector: D-Sub 9 (plug)
	Serial (COM2)	Asynchronous Transmission: RS-422/485, Data Length: 7 or 8 bits, Stop Bit: 1 or 2 bits, Parity: None, Even or Odd, Data Transmission Speed: 2,400 to 115,200 bps, Connector: D-Sub 9 (plug)
	SSD Card	up to 32 GB

General Specifications

Model	PFXST6500TADE
Input Voltage	Rated Input Voltage: 24 Vdc / Input Voltage Limits: 19.2 to 28.8 Vdc
Power Consumption	7.51 W or less when power is not supplied by external devices, 4.56 W or less when screen turns off the backlight (standby mode) (Max 10.56 W)
In-Rush Current	30 A or less
Storage Temperature	-20 to 60 °C (-4 to 140 °F)
Shock Resistance	IEC/EN 61131-2 compliant 147 m/s ² , X, Y, Z directions for 3 times
Certifications	Underwriters Laboratories Inc., UL 121201 and CSA C22.2 No.213, for Industrial Control Equipment used in Class I, Division 2 Hazardous (Classified) Locations, IECEx / ATEX for use in zone 2 gas /zone 22 dust, Directive 2014/34/EU (ATEX): ST-6•00TA only
Voltage Drop	5 ms or less
Corrosive Gas	Free of corrosive gases
Pollution Degree	For use in pollution degree 2 environment
Cooling method	Natural air circulation
Dust	0.1 mg/m ³ (10-7 oz/ft ³) or less (non-conductive levels)
Voltage Endurance	1,000 Vac, 20 mA for 1 minute (between charging and FG terminals)
Vibration Resistance	IEC/EN 61131-2 compliant, 5 to 9 Hz single amplitude 3.5 mm [0.14 in.], 9 to 150 Hz fixed acceleration: 9.8 m/s ² , X, Y, Z directions for 10 cycles (approx. 100 min.)
Insulation Resistance	500 Vdc, 10 MΩ or more
Structure	IP65F, UL 50/50E, Type 1, Type 4X (indoor use only), Type 13 (on the front panel when properly installed in an enclosure)
Weight	1.8kg (3.97 lb) or less
External Dimensions	315 x 241 x 55.3 mm (12.4 x 9.49 x 2.18 in)
Panel Cut-Out Dimensions	301.5 x 227.5 mm (11.87 x 8.96 in) ¹ Panel thickness area: 1.6...5 mm (0.06...0.2 in) ²
Warranty	Two (2) years

¹ For dimensional tolerance, everything +1/0 mm (+0.04/0 in) and R in angle are below R3 (R0.12 in)

² Even if the installation wall thickness is within the recommended range for the "Panel Cut Dimensions", depending on wall's material, size, and installation location of this product and other

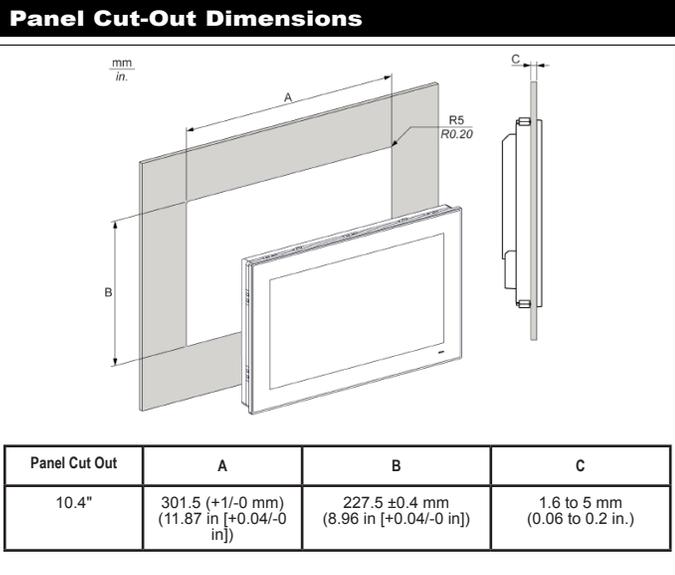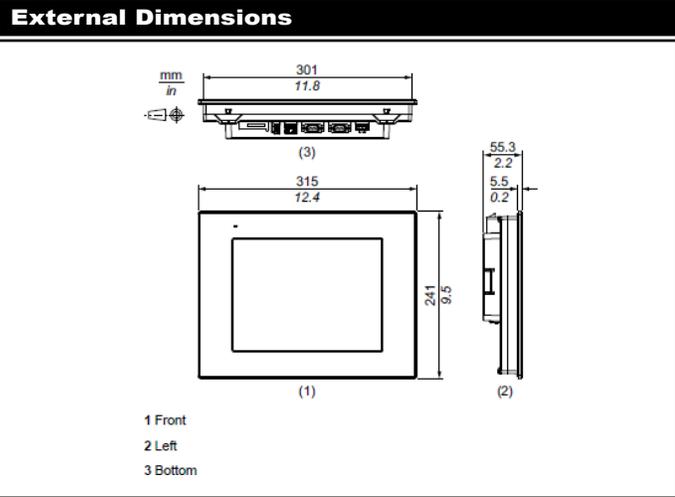

Ordering Information

Model Number	Description
PFXST6500TADE	10.4" Basic HMI 800 x 600 pixel 16 Million colors display with analog signal touch panel, Ethernet(RJ45) x 1, USB Host, 24VDC, Serial Ports (COM 1 & 2), USB, SSD Card

Options

Part Number	Description
PFXZC3AT1	Installation fastener (2 pieces/set).
PFXZGEBT1	Connector to Attach Power Supply
PFXZC5CND1	Primary battery
PFXZHWG51	Installation Gasket for 10.4"