


Communication Solution – Wonderware® InTouch® and Pro-face GP

Now available from Pro-face is an I/O Server to communicate between InTouch and Pro-face Operator Interfaces.

Data collection is the key to understanding your process. Wonderware InTouch can be an essential tool, allowing you to see the data from your manufacturing or process environment. Sometimes running InTouch on an Industrial PC is overkill. Now there is a solution! Connect the Pro-face GP2000, AGP3000 or even the ST403 when you need a remote display then using Ethernet, send data to your InTouch PC.

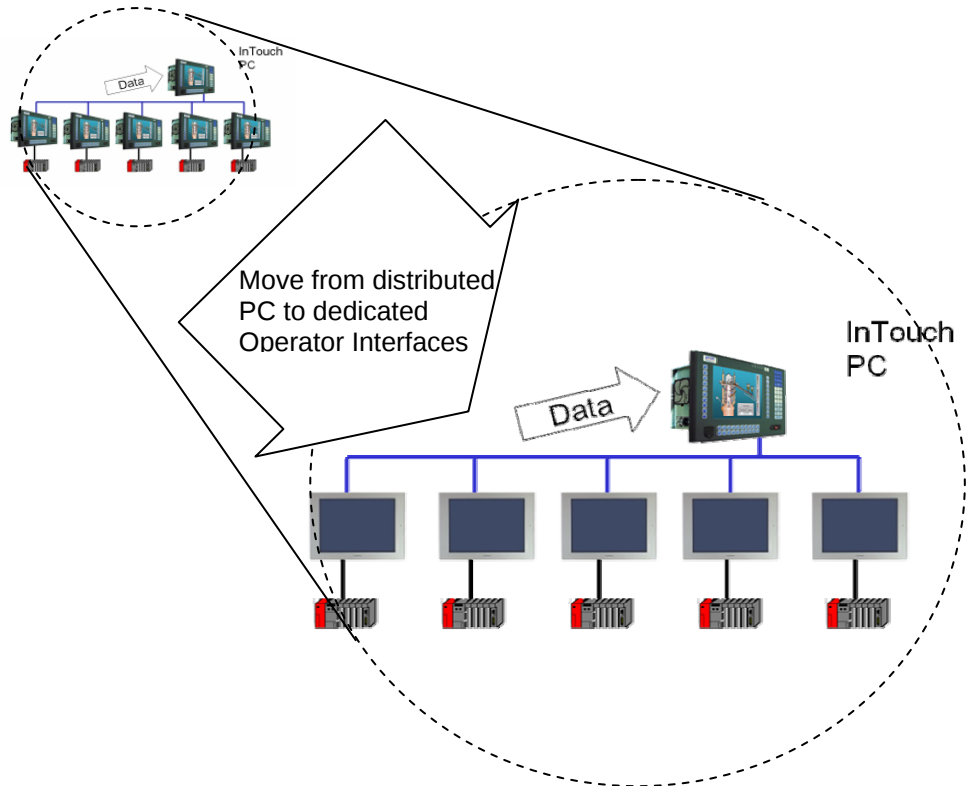


Features/benefits of this I/O server (GPiOSvr.exe):

- **Connect** up to 60 Pro-face GPs, AGPs or ST's to one InTouch PC
- **Save money** by distributing dedicated Operator Interface units where they are needed, eliminating the need for many (potentially costly) InTouch enabled Industrial PCs
- **Increase reliability** by using dedicated Operator Interfaces. The Pro-face Operator Interface units do not have fans or any rotating media.
- **Easy** to configure, only one menu for the general configuration and one for each Topic Name (see figure at right)
- **Network** serial devices; by using the Pro-face Operator Interface to communicate to your serial device, then using the Ethernet port on the Pro-face to transfer data to InTouch
- **Save Space** by using the Pro-face ST403, the 3.8" Ethernet enabled touch screen display
- **Display large amounts of data** by using the Pro-face AGP3750, the 15" Ethernet enabled touch screen display. This I/O Server also supports Pro-face 5.7", 7.4", 10.4", and 12.1" displays.

The screenshot shows the 'Topic Section Setting' dialog box. It contains the following fields and options:

- TopicID:** A dropdown menu showing '1'.
- Disabled / Enabled:** Radio buttons for 'Disabled' and 'Enabled' (selected).
- Topic Name:** A text field containing 'Topic001'.
- IP Address:** Four text fields containing '172', '16', '91', and '23'.
- Port Number:** A text field containing '8000'.
- Polling Cycle (msec):** A text field containing '1000'.
- WriteMode (Delay / at once):** Radio buttons for 'Delay' and 'At once' (selected).
- Timeout (msec):** A text field containing '300'.
- Error MAX Count:** A text field containing '3'.
- Recovery Time (sec):** A text field containing '6'.
- Low-High / High-Low:** Radio buttons for 'Lo-Hi' (selected) and 'Hi-Lo'.
- Buttons:** 'Save' and 'Exit' buttons at the bottom right.

NETWORK DIAGRAM

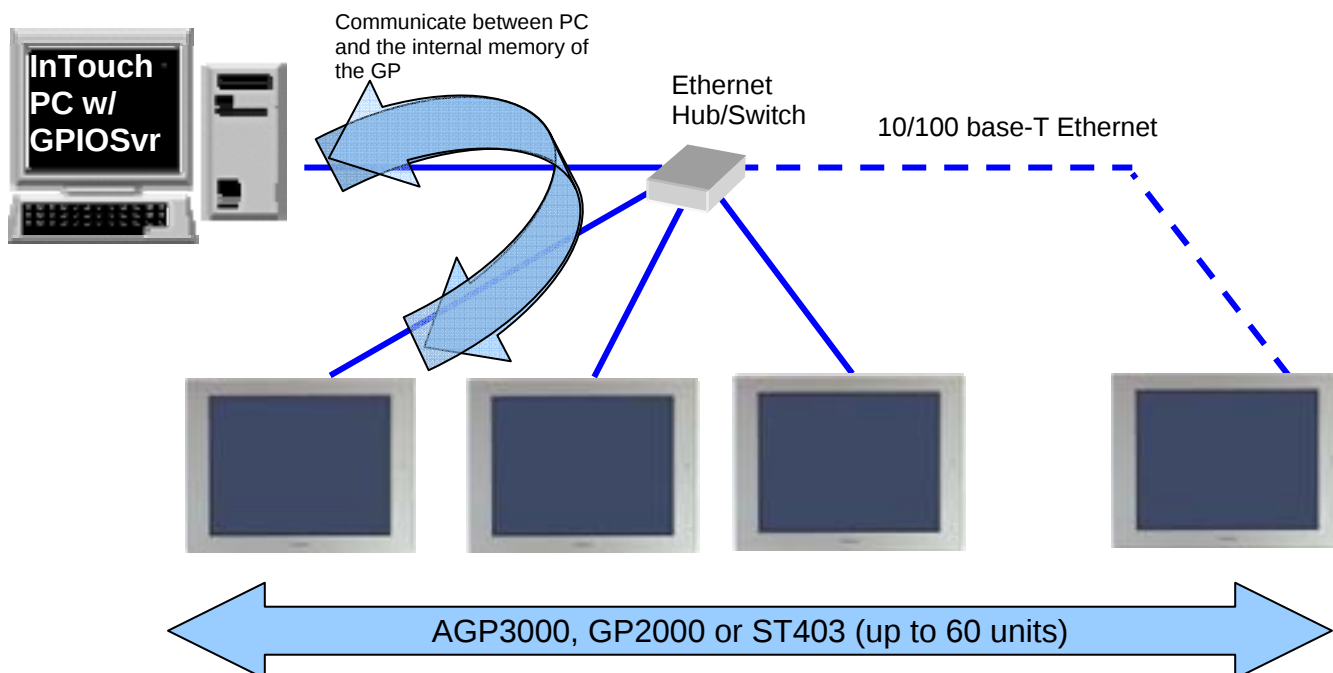

PRODUCT SPECIFICATIONS

Functionality	This program acts as an "IO Server" for Wonderware's InTouch, and allows communication to the Pro-face brand GP Operator interfaces via Ethernet and UDP/IP
Supported communications	DDE and SuiteLink
Supported version	InTouch 7.11 or later
No. of supported GP	Up to 60 GPs
Memory types supported	WORD, SHORT, DWORD, INT, message, BIT, STATUS LS0 to LS8191
PC supported	The PC must be sufficient to run InTouch
Pro-face unit support	GP2000, ST403, AGP3000, Factory Gateway

Wonderware and InTouch are products of, and are registered TradeMarks of Invensys

ORDERING INFORMATION

Order Number: 144741

To find a distributor near you go to: http://www.profaceamerica.com/dealer_locator.html

Pro-face America
Phone 734-429-4971
Fax 734-429-1010
<http://www.profaceamerica.com>

Customer Support Hotline:
734-944-0482

Pro-face



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca